


SERIES 30

REED RELAY

REED RELAYS SERIES 30

DIMENSIONS UNIT (INCH) CONTINUED

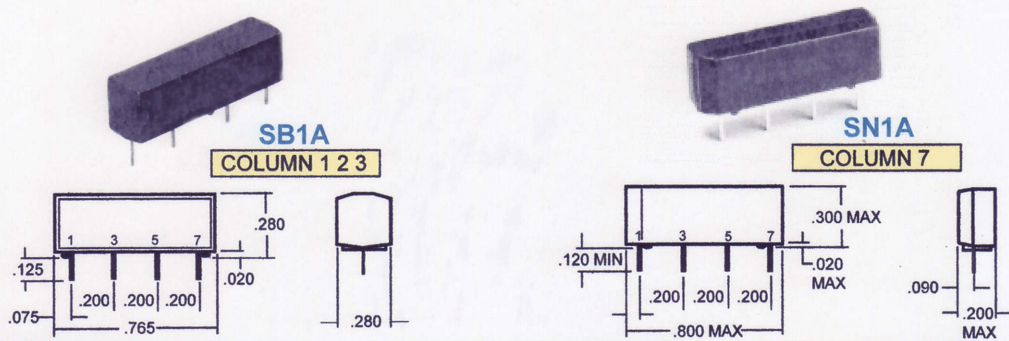

COIL RATINGS

NOMINAL COIL VOLTAGE	PICK UP VDC MAXIMUM @ 20 DEG. C	DROP OUT VDC MINIMUM @ 20 DEG. C	PART NUMBER						
			1 FORM A (SPST)	1 FORM B (SPST)	1 FORM A (SPST)	1 FORM A (SPST) HIGH POWER	1 FORM A (SPST) HIGH VOLTAGE	1 FORM C1 (SPDT)	1 FORM A (SPST)
5	3.8	0.5	SB1A05A	SB1B05B	SD1A05A	SD1A05D	SD1A05H	SC1C05	SN1A05A
12	8.0	1.0	SB1A12A	SB1B12B	SD1A12A	SD1A12D	SD1A12H	SC1C12	SN1A12A
24	16.0	2.0	SB1A24A	SB1B24B	SD1A24A	SD1A24D	SD1A24H	SC1C24	SN1A24A
COIL RESISTANCE + \ - 10% @ 20 DEG. C			500 850 2200	500 500 1750	500 500 2000	500 500 2000	500 500 2000	200 500 2000	500 1000 1400
FOOT PRINTS									
COLUMN NUMBER			1	2	3	4	5	6	7

ORDERING INFORMATION


GLOSSARY

- M - MAGNETIC SHIELD
- E - ELECTROSTATIC SHIELD
- ∧ - DIODE

SPECIAL NOTES

- () ADD THE NEEDED DASH NUMBER TO THE END OF THE PART NUMBER WHEN SPECIAL NEEDS ARE REQUIRED.
- (-1) MAGNETIC SHIELD
- (-2) MAGNETIC SHIELD & ELECTROSTATIC SHIELD (OFFERED ON SD TYPE ONLY)
- (-3) DIODE (OFFERED ON SB TYPE ONLY)
- (-4) DIODE & MAGNETIC SHIELD (OFFERED ON SB TYPE ONLY)

PART NUMBER BREAKDOWN

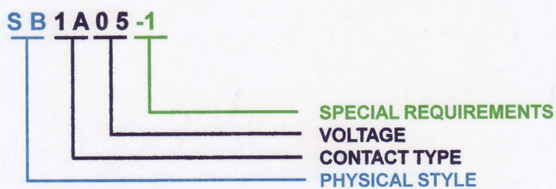

EXTENSIVE CATALOG INFORMATION ON THE INTERNET
WWW.USRELAYS.COM



FOR YOUR CONVENIENCE JUST CHARGE IT!

US RELAYS AND TECHNOLOGY, INC.
 13851 ROSWELL AVENUE UNITS F/G CHINO, CA. 91710 U.S.A.

TEL (909) 902-5112
 FAX (909) 902-5122
WWW.USRELAYS.COM